



HL7593

I²C Programmable 3A DVS Buck Converter

Overview

The HL7593 is a synchronous buck converter optimized to supply different sub systems of portable applications. Its input voltage range is 2.5-5.5V. Its output voltage range is 0.600V to 1.394V in 6.25mV steps, programmed through an I²C interface. Its output voltage can be adjusted on the fly to provide dynamic voltage scaling (DVS) function with a programmable slew rate.

The HL7593 can deliver up to 86% efficiency 3A output current and maintain over 80% efficiency at 10mA or higher light load currents. It operates at fixed frequency of 2.4MHz, which reduces the value and size of the external components. A wide range of output capacitors can be used to optimize output load transient performances. The inductors from 0.33μH to 1.0μH may be used without affecting loop stability.

At moderate to light loads, the pulse frequency modulation (PFM) is used to maintain conversion efficiency with a typical non-switching quiescent current of 48μA. Even with such a low quiescent current, the HL7593 maintains excellent load and line transient responses. At higher loads, the system automatically switches to fixed-frequency pulse width modulation (PWM) operation at 2.4MHz for minimum VOUT ripple and optimal load transient response. In shutdown mode, the supply current drops below 1μA and reduces a power consumption. The PFM mode can be disabled if needed through I²C registers.

The HL7593 supports VOUT remote sensing. It's feedback signal VOUT can be connected close to the power supply pin of the load for a true point-of-load operation without affecting control loop stability.

The HL7593 is available in a 15-bump, 0.4mm pitch, 2.01mm x 1.21mm WLCSP.


Features

- Input voltage operation ranges: 2.5-5.5V
- Programmable output voltage:
 - 0.600-1.394V in 6.25mV/step
- Maximum output current: 3A
- Fixed 2.4MHz switching frequency
- Seamless PWM/PFM mode switching for high efficiency at light-load
- Output dynamic voltage scaling (DVS) with programmable voltage slew rate
 - 0.5mV to 64 mV/step
- Excellent load and line transients
- Quiescent current in PFM mode: 48μA
- I²C interface with SM, FM, FM⁺, and HS modes
- Comprehensive protections
 - Input under-voltage lockout (UVLO)
 - Input over-voltage protection (OVP)
 - Over-current and short-circuit protections
 - Thermal shutdown
- 2.01mm x 1.21mm 15-bump WLCSP package

Applications

- Application Processors
- Memory, Hard Disk Drive, and SSD
- Smartphones
- Tablets
- Handheld Devices

Simplified Application Diagram

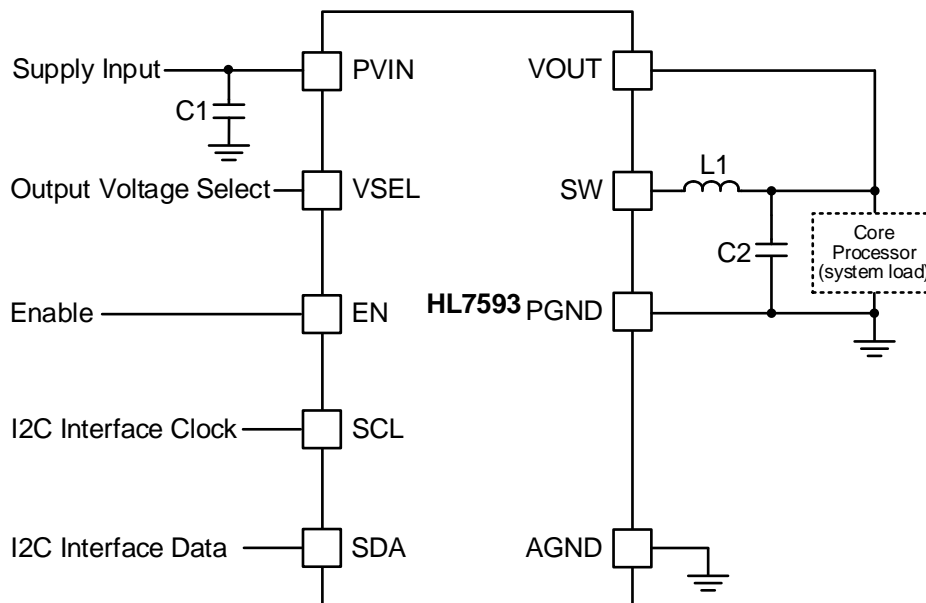

Ordering Information

Part Number	Default VOUT after POR		Default mode after POR		I2C Address	Package	Packing Method
	VSEL=0	VSEL=1	VSEL=0	VSEL=1			
HL7593WL01 HL7593HWL01 ⁽¹⁾	0.600V	0.600V	Auto PFM	Forced PWM	1010 000	WLCSP	Tape & Reel
HL7593WL02 HL7593HWL02 ⁽¹⁾	1.125V	1.125V	Auto PFM	Forced PWM	1010 111	WLCSP	Tape & Reel
HL7593WL04 HL7593HWL04 ⁽¹⁾	0.900V	0.900V	Auto PFM	Auto PFM	1010 101	WLCSP	Tape & Reel
HL7593WL06 HL7593HWL06 ⁽¹⁾	0.800V	0.800V	Forced PWM	Auto PFM	1100 001	WLCSP	Tape & Reel
HL7593WL07 HL7593HWL07 ⁽¹⁾	1.200V	1.200V	Auto PFM	Forced PWM	1100 000	WLCSP	Tape & Reel
HL7593WL08 HL7593HWL08 ⁽¹⁾	1.05V	1.05V	Auto PFM	Forced PWM	1010 111	WLCSP	Tape & Reel
HL7593WL0A HL7593HWL0A ⁽¹⁾	0.750V	0.750V	Auto PFM	Forced PWM	1100 001	WLCSP	Tape & Reel

Notes:

1.HL7593HWLxx is a second source foundry version part number.

Important Notice

Halo Microelectronics reserves the right to modify, improve, and terminate its products, services, documentations, etc. without advance notice. Customers are encouraged to contact Halo Microelectronics sales representatives to get the latest product information.

Without proper legal authorization, Halo products shall not be used for medical or military applications. Halo Microelectronics does not assume any liability of personal or property damages of any kind due to such applications.

All text, images, trademarks of this document, and any intellectual property contained in the product and in this document belong to Halo Microelectronics Co. Ltd. No part of this document may be used, copied, modified, distributed, or published without legal authorization from Halo Microelectronics.

© 2022 Halo Microelectronics. All rights reserved. www.halomicro.com